



Griffco Valve Inc.
6010 N. Bailey Ave., Suite 1B
Amherst, NY 14226 USA
Phone: 1 716 835-0891
Fax: 1 716 835-0893

CHEMICAL PUMP ACCESSORIES



CALL: 1 800 GRIFFCO


BACK PRESSURE VALVES

Griffco T & G-Series diaphragm back pressure valves are designed to enhance the performance of any chemical feed system by applying a constant pressure to the discharge of the pump. This will ensure positive ball seating in the pump check valve, a positive head differential and a constant minimum discharge head. The valve also acts as an anti-siphon valve.

Features:

- Robust Construction ensures high reliability in municipal and industrial applications.
- Vulcanized PTFE / EPDM diaphragm
- Adjustable 5 - 150 psi pressure range
- Optional 250 psi & 350 psi rated valves
- Anti-Siphon Function
- Optional built in priming valve
- Tamper resistant adjustment screw
- Wide range of liquid handling materials include: PVC, CPVC, PP, PVDF, PTFE 316 SS, Alloy20, Hastalloy C

Operation:

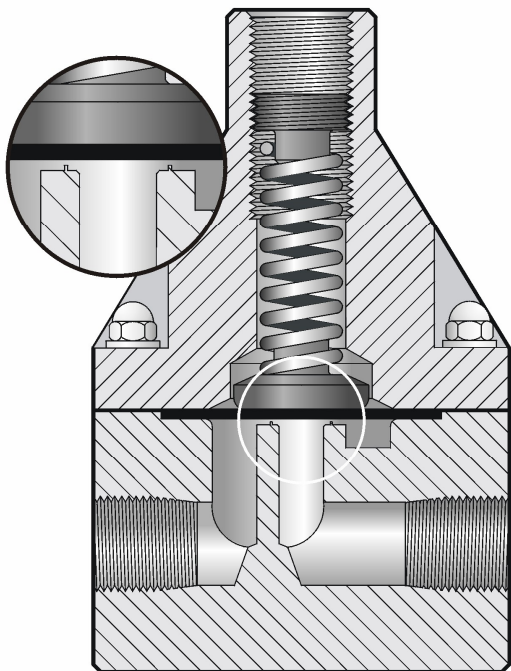

Griffco diaphragm back pressure valves apply positive discharge pressure to a metering pump system to prevent siphoning and eliminate varying dosage rates caused by fluctuating downstream pressure. The diaphragm is held against the valve seat by an internal spring. When the preset pressure is exceeded, the diaphragm is forced up and chemical flows through the valve to the injection point. The valves are preset for 50 psi, however they are field adjustable from 10 - 150 psi via the adjustment screw. Installation should be as close to the injection point as possible to prevent chemical line drainage, and it is most important that all chemical system equipment such as pulsation dampeners and pressure gauges are between the pump and back pressure valve.

PRESSURE RELIEF VALVES


Griffco T & G-Series diaphragm pressure relief valves are designed to protect chemical feed systems from damage caused by excessively high pressure, a result of a blockage in the chemical feed line due to defective equipment, accidental valve closure, or plugged injection valves.

Features:


- Robust Construction ensures high reliability in municipal and industrial applications.
- Vulcanized PTFE / EPDM diaphragm
- Adjustable 5 - 150 psi pressure range
- Optional 250 psi & 350 psi rated valves
- Tamper resistant adjustment screw
- Wide range of liquid handling materials include: PVC, CPVC, PP, PVDF, PTFE 316 SS, Alloy20, Hastalloy C




Operation:

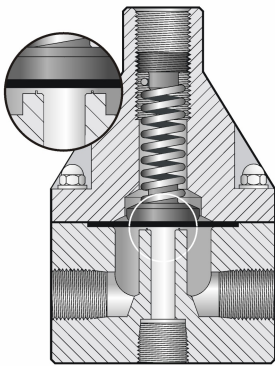

3 port design, 1/4" – 1" valves

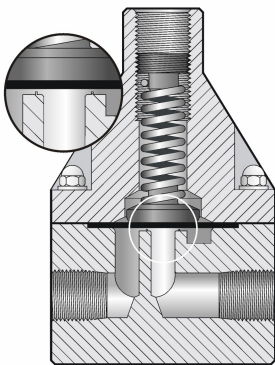

2 port design 1 1/2" – 2" valves

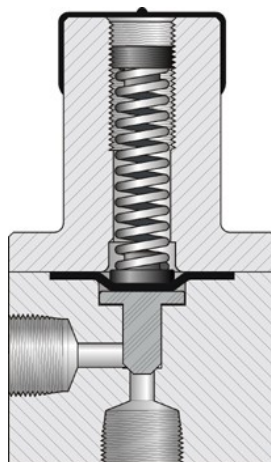

2 port design, high pressure valve

Griffco diaphragm pressure relief valves operate when the pressure in the chemical system exceeds the preset pressure of the valve. The diaphragm is held against the valve seat by an internal spring. When the preset pressure is exceeded the diaphragm is forced up and the chemical flows out the relief port, back to the chemical tank or to the suction side of the pump. The valves are pre-set at 50 psi, however they are field adjustable from 0 - 250 psi, (optional 350 psi) via the adjustment screw. The relief valve should be set approximately 15 psi higher than the system pressure. Installation should be made as close to the pump as possible, without any valves or accessories between the relief valve and the pump. Consult your pump manufacturer for his recommendations.


EQUIPMENT SELECTION GUIDE

Technical Data:

Sizes:			1/4", 3/8", 1/2", 3/4", 1", 1 1/2", 2", 3", 4"		
Connections:			NPT, Socket, Flange		
Pressure Adjustment			0 - 50 psi, 10 - 150 psi, 10 - 250 psi, 50 - 350 psi (option on metal valves)		
Flow Rates @ 150 psi			Shipping Weight: lbs		
Size	Pulsating	Continuous	Plastic	Metal / Plastic Top	Metal / Metal Top
1/4"	100 USGPH	5 USGPM	1.0	2.5	3.0
3/8"	200 USGPH	10 USGPM	1.0	2.5	3.0
1/2" (T-Series)	260 USGPH	15 USGPM	1.0	3.0	3.5
1/2" (G-Series)	300 USGPH	21 USGPM	3.0	5.5	6.5
3/4"	300 USGPH	21 USGPM	3.0	5.5	6.5
1"	500 USGPH	26 USGPM	3.5	6.0	7.0
1 1/2"	1200 USGPH	63 USGPM	9.0	18.5	26.0
2"	2350 USGPH	120 USGPM	9.0	20.0	30.0
3"	5200 USGPH	270 USGPM	28.0		
4"	5200 USGPH	270 USGPM	30.0		
Max Temperature: (°F)			PVC: 140°; CPVC: 190°; PVDF: 250°; PTFE: 350°; Metal: 300°,		
Materials of Construction:					
Diaphragm			PTFE / EPDM, Optional: Viton & PTFE / Viton		
Valve Top			Standard: Noryl, Optional: PVC, 316 SS, Others on Request		
Valve Body			PVC, CPVC, PP, PTFE, PVDF, 316 SS, A 20, Hast. C, Others on Request		


Dimensions:

G-Series

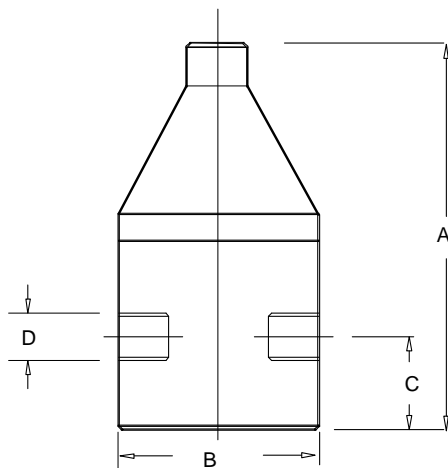

D (NPT)	A (in)	B (in)	C (in)
1/2"	5.60	3.50	1.10
3/4"	5.60	3.50	1.10
1"	5.90	3.50	1.25
1 1/2"	8.95	4.50	2.10
2"	8.95	5.00	2.10
3"	12.0	15.0	3
4"	12.0	15.0	3

T-Series

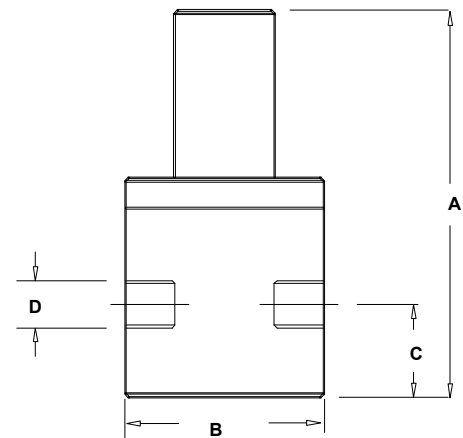

D (NPT)	A (in)	B (in)	C (in)
1/2"	3.90	2.375	0.75
3/8"	3.90	2.375	0.75
1/2"	4.60	2.375	1.10

PRODUCT CODES

Back Pressure Valves:

Product Codes for Ordering T-Series Valves

BPT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	1	2	3
1 = Size		2 = Material	
025 - 1/4+		P - PVC	
038 - 3/8+		CP - CPVC	
050 - 1/2+		PP - Polypro	
		T - PTFE	
		K - PVDF	
		S - 316 SS	
		A - Alloy 20	
		C - Hastalloy C	

3 = Options
V - Viton Diaphragm
S - Socket Connections
F - Flanged Connections
OSS - Optional 316 SS Top (only on metal valves)
MSS - 50 - 350 psi 316 SS Top (only on metal valves)
AR1 - Optional PVC Priming Valve
AR2 - Optional PP Priming Valve
AR3 - Optional PVDF Priming Valve
AR4 - Optional 316 SS Priming Valve

Product Codes for Ordering G-Series Valves

BPG	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
BGHF (High Flow)	1	2	3
1 = Size		2 = Material	
025 - 1/4+		P - PVC	
038 - 3/8+		CP - CPVC	
050 - 1/2+		PP - Polypro	
075 . 3/4+		T - PTFE	
100 . 1+		K - PVDF	
150 . 1 1/2+		S - 316 SS	
200 . 2+		A - Alloy 20	
300 . 3+		C - Hastalloy C	
400 . 4+			

3 = Options
V - Viton Diaphragm
S - Socket Connections
F - Flanged Connections
OSS - Optional 316 SS Top (only on metal valves)
MSS - 50 - 350 psi 316 SS Top (only on metal valves)
AR1 - Optional PVC Priming Valve
AR2 - Optional PP Priming Valve
AR3 - Optional PVDF Priming Valve
AR4 - Optional 316 SS Priming Valve

Pressure Relief Valves:

Product Codes for Ordering T-Series Valves

PRT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	1	2	3
1 = Size		2 = Material	
025 - 1/4+		P - PVC	
038 - 3/8+		CP - CPVC	
050 - 1/2+		PP - Polypro	
		T - PTFE	
		K - PVDF	
		S - 316 SS	
		A - Alloy 20	
		C - Hastalloy C	

3 = Options
V - Viton Diaphragm
S - Socket Connections
F - Flanged Connections
OSS - Optional 316 SS Top (only on metal valves)
MSS - 50 - 350 psi 316 SS Top (only on metal valves)

Product Codes for Ordering G-Series Valves

PRG	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
PGHF (High Flow)	1	2	3
1 = Size		2 = Material	
025 - 1/4+		P - PVC	
038 - 3/8+		CP - CPVC	
050 - 1/2+		PP - Polypro	
075 . 3/4+		T - PTFE	
100 . 1+		K - PVDF	
150 . 1 1/2+		S - 316 SS	
200 . 2+		A - Alloy 20	
		C - Hastalloy C	

3 = Options
V - Viton Diaphragm
S - Socket Connections
F - Flanged Connections
OSS - Optional 316 SS Top (only on metal valves)
MSS - 50 - 350 psi 316 SS Top (only on metal valves)

CALIBRATION CYLINDERS

Griffco PVC & Borosilicate Glass Calibration Cylinders

are designed to enhance the performance of a chemical feed system by providing a verification of the flow rate of the chemical feed pump.

Features: PVC Cylinders

- High Reliability / Low Cost
- High Contrast Graduation Markings
- Clear Easy-View Tube
- Robust Construction
- Direct GPH Readout
- Sealed Top with Overflow Connection
- Optional EZ-Clean Model
- Optional Open Top with Dust Cap

Features: Glass Cylinders

- High Reliability / Low Cost
- Borosilicate Glass Tube
- 5 End Cap Materials
- Easy Disassembly For Cleaning
- Protective Outer Shield
- High Contrast Graduation Markings
- US, Metric & GPH Scales
- Sealed Top with Overflow Connection

Operation:

Griffco calibration cylinders are installed in the suction line to the chemical pump. Two isolating valves, (not supplied) must be installed in the suction line as per the typical installation drawing. The top of the cylinder should be vented back to the storage tank or to drain.


Fill the cylinder to the top mark then close the valve from the chemical tank. Switch on the chemical feed pump and draw down the chemical in the cylinder for 30 seconds. Switch the pump off. The reading on the left side of the cylinder is a direct readout of USgph.

Alternatively, observe the volume withdrawn on the ml scale. To convert to LPH or GPH use this formula:

$$\text{LPH} = (\text{volume} \div \text{draw time}) \times 3.6$$

$$\text{GPH} = (\text{volume} \div \text{draw time}) \times 0.952$$

Note: Maximum cylinder pressure is 15 psi

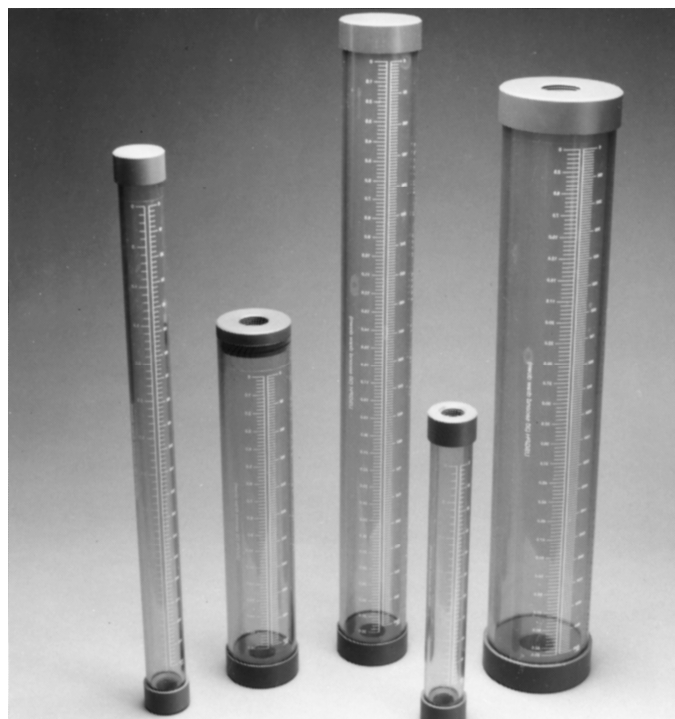

Product Codes:

For PVC	CC	-
For Glass	CCG	-

	1	2
1=Size	2=End Caps/Material	
0100 . 100mL	S = Sealed c/w Vent	
0200 . 200 mL	L = Dust Cover	
0500 . 500mL	EZ = Easy Clean	
1000 . 1000 mL	P = PVC	
2000 . 2000 mL	CP = CPVC	
4000 . 4000 mL	PP = Polypro	
10000 . 10000 mL	T = Teflon	
20000 . 20000 mL	K = PVDF	
	M = 316 SS	
	A = Alloy 20	

INJECTION QUILLS & ACCESSORIES

INJECTION QUILLS:

Griffco injection check valves are designed to ensure chemical feed systems feed chemical into the center of the process stream for better mixing and to prevent corrosion along the edge of the process pipe. The ball check prevents the process fluid from going back up the chemical line.

Features:

- High Reliability / Low Cost
- Robust Machined Construction
- Comes Complete with Union
- Hastalloy C Spring
- Integrated Quill
- Optional Chemical Line Drain
- Wide Range of Materials



ACCESSORIES:

Integrated Priming Valve

Griffco diaphragm backpressure valves are designed to enhance the performance of chemical feed systems. The addition of a priming valve to the backpressure valve enables the manual priming of the pump.

Features:

- Manual Pump Priming
- Manual Pump Head Degassing
- Optional Automatic Degassing
- Available in PVC, PP, PVDF, 316 SS



Spare Parts Kits:

Kits include:

- Diaphragm
- Spring
- Threaded adjustment screw
- Diaphragm support disc

Connector Sets:

To connect flexible tubing to the valve


Wall Brackets:

To facilitate mounting the back pressure and pressure relief valves.

Calibration Cylinder Stands & Accessories:

- Floor Stands
- Ball Valves

TYPICAL INSTALLATION

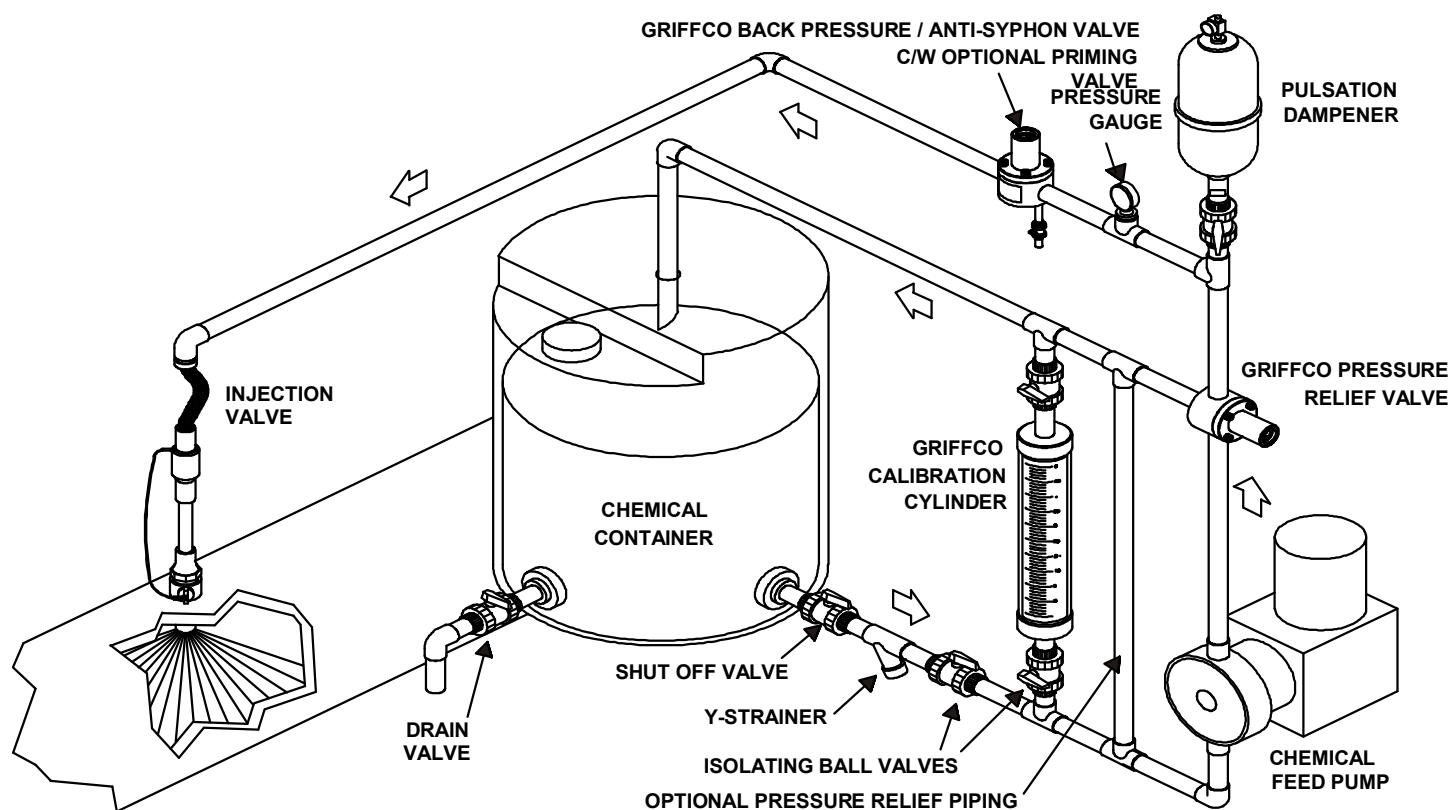

Griffco Valve Inc.
6010 North Bailey Ave
Suite 1B
Amherst, NY 14226 USA
PH: 716 835-0891
FAX: 716 835-0893

Website: www.griffcovalve.com Email: sales@griffcovalve.com