e

Neptu

E Series "dia-PUMP"

Economy Diaphragm Pump

Series 500-E offers an economical alternate to the standard Series 500 "dia-PUMP" or an opportunity to "step-up" from packed plunger pumps to a true hydraulic diaphragm pump at a modest cost increment.

Features

- Capacity to 30 gph (113 lph); Pressure to 1100 psi (77 kg/cm²)
- Available liquid end materials: Cast Iron, 316SS, PVC, Kynar[®]
- Variable Oil By-pass[™] stroke adjustment allows improved valve performance over variable linkage designs. (See Bulletin DP-1100 for details on "How It Works".)
- Capacity control options include pneumatic or electric stroke length adjustment and variable speed drives.

For Low Volume Applications request Bulletin LV. For High Viscosity Applications request Bulletin VP. For Higher Volumes and Pressures request Bulletin DP-1100.

> MODEL 525-E-N3

CROSS SECTIONAL VIEW



| CODE | HEAD | VALVE BODY | VALVE CHECK | DIAPHRAGM |
|------|-----------|------------|-------------|-----------|
| N1 | Cast Iron | 316SS | 316SS | Teflon® |
| N3 | 316SS | 316SS | 316SS | Teflon® |
| N5 | PVC* | PVC* | Glass*** | Teflon® |
| AR** | PVC* | PVC* | Glass*** | Teflon® |
| N8 | Kynar | Kynar | Glass*** | Teflon® |


* PVC head pumps are satisfactory for temperatures to 125°F/52°C.

** PVC head with air release valve for sodium hypochlorite service.

*** Special materials available for services not compatible with glass.

Neptune Series 500-E Economy Diaphragm Pumps

| SELECTION CHART | MODEL NUMBER | CAPACITY GPH (LPH) @ 100 PSI | MATERIALS OF CONSTRUCTION | MAXIMUM PRESSURE PSI (KG/CM ²) | PISTON DIAMETER | STROKES PER MINUTE | SHIPPING WEIGHT LBS. |
|---|---|------------------------------------|---|--|---------------------------|--------------------------|----------------------------|
| Standard Motor: 1/3HP-1ph-115VAC-60c-TEFC | 510-E-N1* 510-E-N3* 510-E-N5* 510-E-AR* | 0.8 (3.0) | Cast Iron 316SS PVC Hypochlorite | 700 (49) 700 (49) 150 (11) ◄ Select Mod | 0.500 del ARPZ-61 fror | 37 n Bulletin PZ | 59 |
| MODEL 515-E-N5 | 510-E-N8* 515-E-N1 515-E-N3 515-E-N5 515-E-AR 515-E-N8 | 3.0 (11.3) | Kynar Cast Iron 316SS PVC Hypochlorite Kynar | 150 (11) 1100 (77) 1100 (77) 150 (11) 150 (11) 150 (11) | 0.500 | 117 | 59 |
| | 520-E-N1 520-E-N3 520-E-N5 520-E-N8 | 2.0 (7.5) | Cast Iron 316SS PVC Kynar | 700 (49) 700 (49) 150 (11) 150 (11) | 0.687 | 37 | 59 |
| | 522-E-N1 522-E-N3 522-E-N5 522-E-AR 522-E-N8 | 4.0 (15.1) | Cast Iron 316SS PVC Hypochlorite Kynar | 700 (49) 700 (49) 150 (11) 150 (11) 150 (11) | 0.687 | 72 | 59 |
| MODEL 525-E-AR | 525-E-N1 525-E-N3 525-E-N5 525-E-AR 525-E-N8 | 7.0 (26.5) | Cast Iron 316SS PVC Hypochlorite Kynar | 900 (63) 900 (63) 150 (11) 150 (11) 150 (11) | 0.687 | 117 | 59 |
| | 527-E-AR | 8.6 (32.0) | Hypochlorite | 150 (11) | 0.687 | 144 | 59 |
| C C C C C C C C C C C C C C C C C C C | 532-E-N1 532-E-N3 532-E-N5 532-E-N8 | 11.0 (41.6) | Cast Iron 316SS PVC Kynar | 350 (25) 350 (25) 150 (11) 150 (11) | 1.062 | 72 | 59 |
| | 535-E-N1 535-E-N3 535-E-N5 535-E-N8 | 18.0 (68.0) | Cast Iron 316SS PVC Kynar | 350 (25) 350 (25) 150 (11) 150 (11) | 1.062 | 117 | 59 |
| *This model cannot be used for suction lift applications. | 547-SE-N3 547-SE-N5 | 30.0 (113.0) | 316SS PVC | 200 (14) 150 (11) | 1.187 | 144 | 65 |
| DIMENSIONS | 547-DE-N3 | 30.0 ea.head (113.0 each) | 31655 | 200 (14) | 1.187 | 144 | 85 |

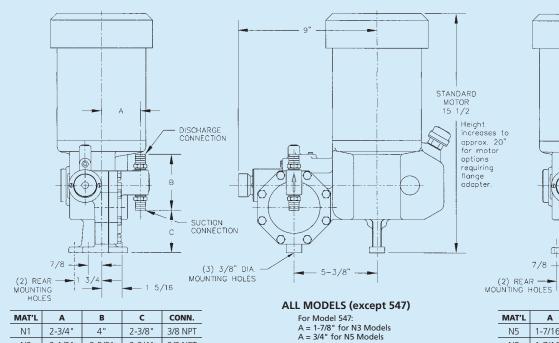

See Bulletin DP-1100 for Model 547 mounting dimensions.


N3

2-1/2"

3-5/8"

2-3/4"

3/8 NPT



| MAT'L | Α | В | с | CONN. | |
|-------|---------|--------|-------|---------|--|
| N5 | 1-7/16" | 7-3/8" | 3/4 " | 1/2 NPT | |
| N8 | 1-7/16" | 7-3/8" | 3/4 " | 1/2 NPT | |


Chemical Feed Systems With Series 500-E Pumps

Economy Top-Mounted Chemical Feed System With Model ET-P Tank

System includes:




- I. Series 500-E Pump
- II. ET-P Tank (including):
 - (a) 50 gal. self-supporting polyethylene tank. (b) Molded polyethylene
 - cover.
 - (c) Suction piping and PVC foot valve strainer.
- III. Model L-2-300 Agitator – optional




Agitators

Neptune also offers a line of economically priced agitators for use with the tanks shown above:

| MODEL NUMBER | MOTOR DESCRIPTION | | | *Mounting | |
|--------------------|--|-------------------------------|----------------|-------------------|--|
| L-1-300 L-2-300 | 1/20HP-1-115-TEFC 1/20HP-1-115-TEFC | Direct Mount* Vert. to Lid | 316SS 316SS | plate supplied | |
| A-1-301 | 1/4HP-1-115-TEFC | Direct Mount* | 316SS | on tank. | |





AIR RELEASE VENT CONNECTION 1 7/16 2 3/16 15 1/2 APPROX 1/2" NPT DISCHARGE 1 4 13/16 Ţ 11/16 7/8 1/2" NPT 1 3/4 SUCTION (2) REAR 1 5/16 MOUNTING HOLES


"AR" MODELS

System includes:

Bottom-Mounted Chemical Feed

System With Model 50PT-300 Tank

- I. Series 500-E Pump II. 50PT-300 Tank (including):
 - (a) 50 gal. polyethylene tank in steel support.
 - (b) Molded polyethylene cover.
 - (c) PVC suction piping, PVC valve and iron strainer.
- III. Model L-1-300 or A-1-301 Agitators – optional





Other Related Accessories From Neptune Chemical Pump Co., Inc.







Valves

By-Pass Feeders With or without legs to 12 gallons; 300 psi **Request Bulletin BF**



Injection Quill CPVC, Kynar, 316SS and Carpenter C20-Cb3 **Request Bulletin CS**

Corporation Stops & Quills CPVC, Kynar, 316SS and Carpenter C20-Cb3 **Request Bulletin CS**



Nimble Skid Flexible Pump Packages

Two, three or four pumps pre-piped with choice of accessories. Corrosion resistant poly base. Containment available.



30 Gal. Mini Tank Use with any Series 500-E or Electronic Metering Pump **Request Bulletin FDP**




Electronic Metering Pumps Manual milliamp or pulse controlled

Request Bulletin PZ

Calibration Columns

Standard sizes 100, 250, 500, 1,000 and 4,000 ml. **Request Bulletin CC**





lept CHEMICAL PUMP CO., INC.

P.O. Box 247 • Lansdale, PA 19446-0247 Tel: 215-699-8700 • Fax: 215-699-0370 Toll-Free Tel: 1-888-3NEPTUNE (1-888-363-7886) Toll-Free Fax: 1-800-255-4017 Web Site: http://www.neptune1.com E-mail: pump@neptune1.com

SOLD BY: