

Information Sheet

Drum Safety Wand Suction Tubing Straightener Assembly


Model Number **10783**

For standard 55 gallon metal drums with 2" NPT bung fittings

Model Number **26783**

For plastic drums with 2" buttress threads

- *Prevents curling of suction tube*
- *Keeps foot valve at bottom of tank*
- *Provides safe transfer of suction line from tank to tank*
- *Prevents suction tube from swinging against operator*
- *Closes large bung hole against contamination from outside*
- *Provides dry hand hold when moving suction tubing from empty to full drum*
- *Chemically resistant polypropylene construction*

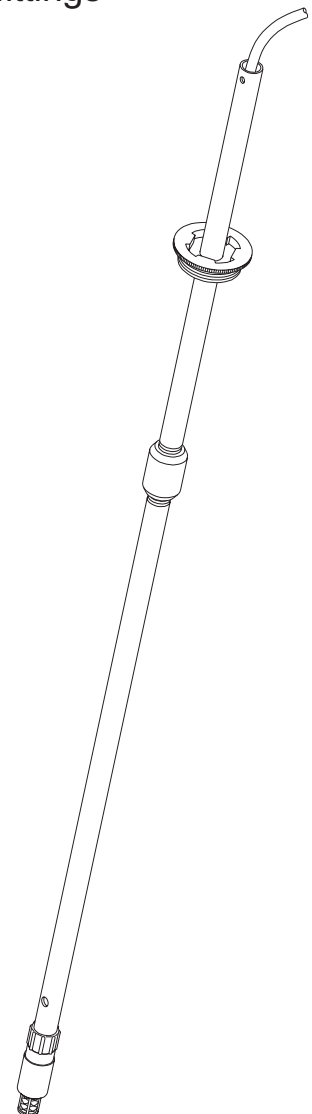


201 Ivyland Road
Ivyland, PA 18974 USA
TEL: 215-293-0401
FAX: 215-293-0445
<http://www.lmipumps.com>



Instruction Sheet

Drum Safety Wand Suction Tubing Straightener Assembly

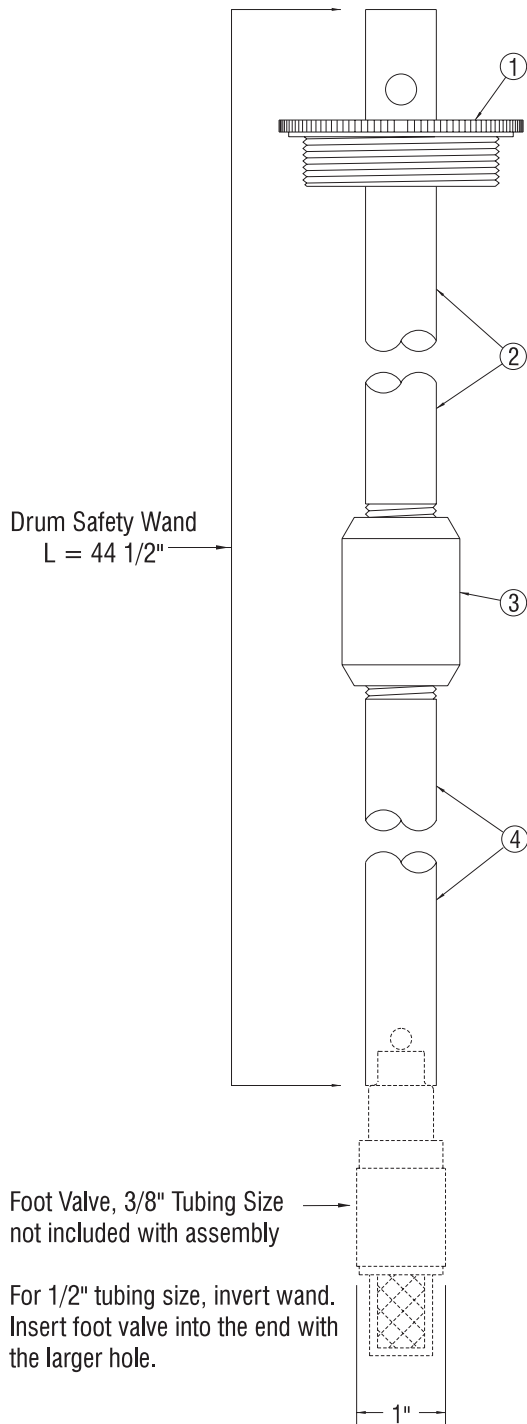

INSTRUCTIONS

1. Assemble drum safety wand/suction tube straightener as shown in drawing.
2. Route tubing through wand. At drain hole end, connect suction tubing to foot valve (refer to Liquid End Instruction sheet).
3. Press coupling nut end of foot valve into pipe recess.
4. Insert drum safety wand/suction tube straightener assembly into drum and secure with drum fitting.

NOTE: Dual purpose - one end accepts foot valve using .375" O.D. tubing, the other end accepts foot valve using .5" O.D. tubing.

MODEL NO. 26783

KEY NO.	PART NO.	DESCRIPTION	QTY.
1	26784-1	Buttress Thread Fitting	1
2	10785	1/2" NPT Pipe, 25" L	1
3	10786-1	1/2" NPT Coupling	1
4	10787	1/2" NPT Pipe, 17" L	1

MODEL NO. 10783

KEY NO.	PART NO.	DESCRIPTION	QTY.
1	10784-1	Drum Bung Fitting	1
2	10785	1/2" NPT Pipe, 25" L	1
3	10786-1	1/2" NPT Coupling	1
4	10787	1/2" NPT Pipe, 17" L	1