

Information Sheet


Polyethylene Tank Assemblies



NO. 27421

10 GALLON TANK ASSEMBLY

- Ultraviolet resistant, yellow polyethylene tank.
- Molded recesses for mounting of any LMI Series A, J, or P pump.
- Convenient and light weight, ships economically.
- Large fill hole at top allows easy replenishing of solution.
- Slightly translucent yet rugged design allows checking solution level at a glance.

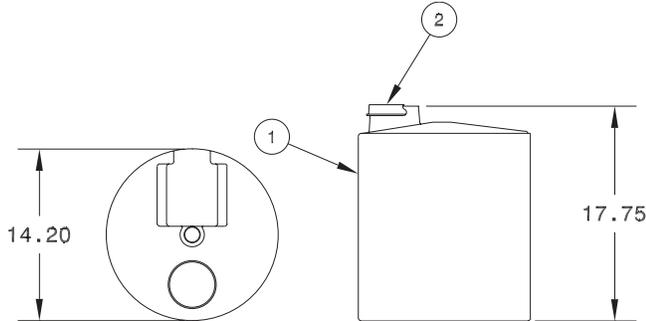

Model No. 27421 Tank Assembly
(Pump must be ordered separately.)

Shipping Weight: 7 lbs (3.2 kg)

NOTES:

1. Full, flat bottom support required.
2. Maximum solution/ambient temperature 110° F (43° C).
3. Minimum solution/ambient temperature 0° F (-18° C).
4. Not suitable for use with slurries, concentrated organic solvents, oils and related materials.



**AGITATOR
NO. 27591**

115 VAC, 50/60 Hz, 1.5 amp, 175 watts,
1/20 HP. 27" S.S. shaft with S.S. impeller
and resistant coating.



**LIQUID LEVEL SWITCH
NO. 27417**

115 VAC, 50/60 Hz, max load: 3 amps.
Glass fiber reinforced polypropylene housing.
Polypropylene float. Connections for pump
and low-level signal device.



201 Ivyland Road
Ivyland, PA 18974 USA
TEL: (215) 293-0401
FAX: (215) 293-0445
<http://www.lmipumps.com>